
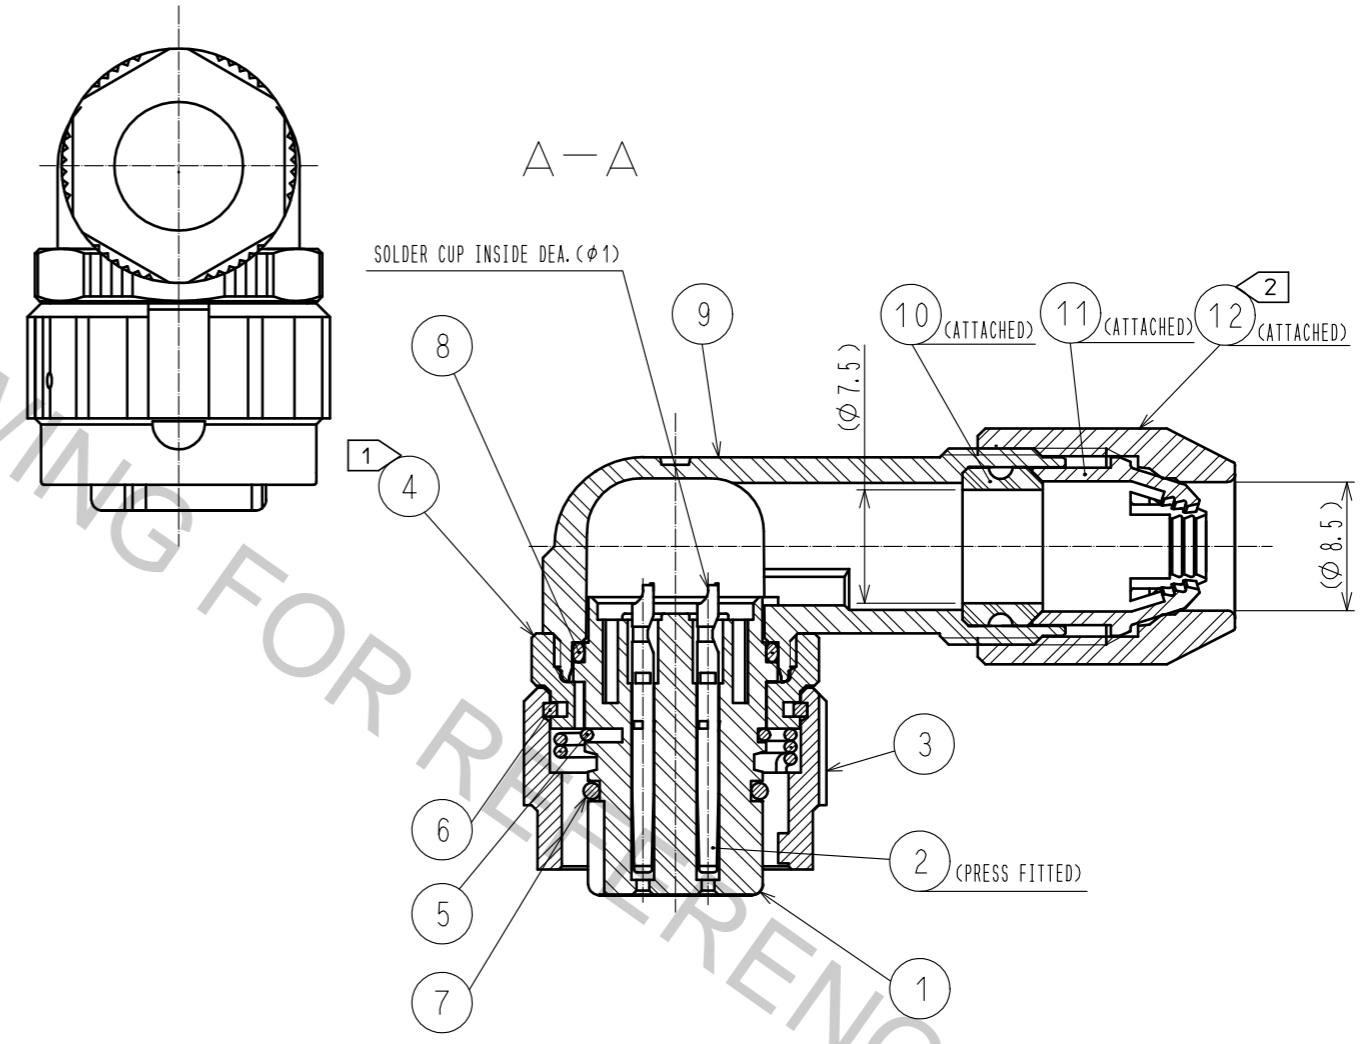


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.

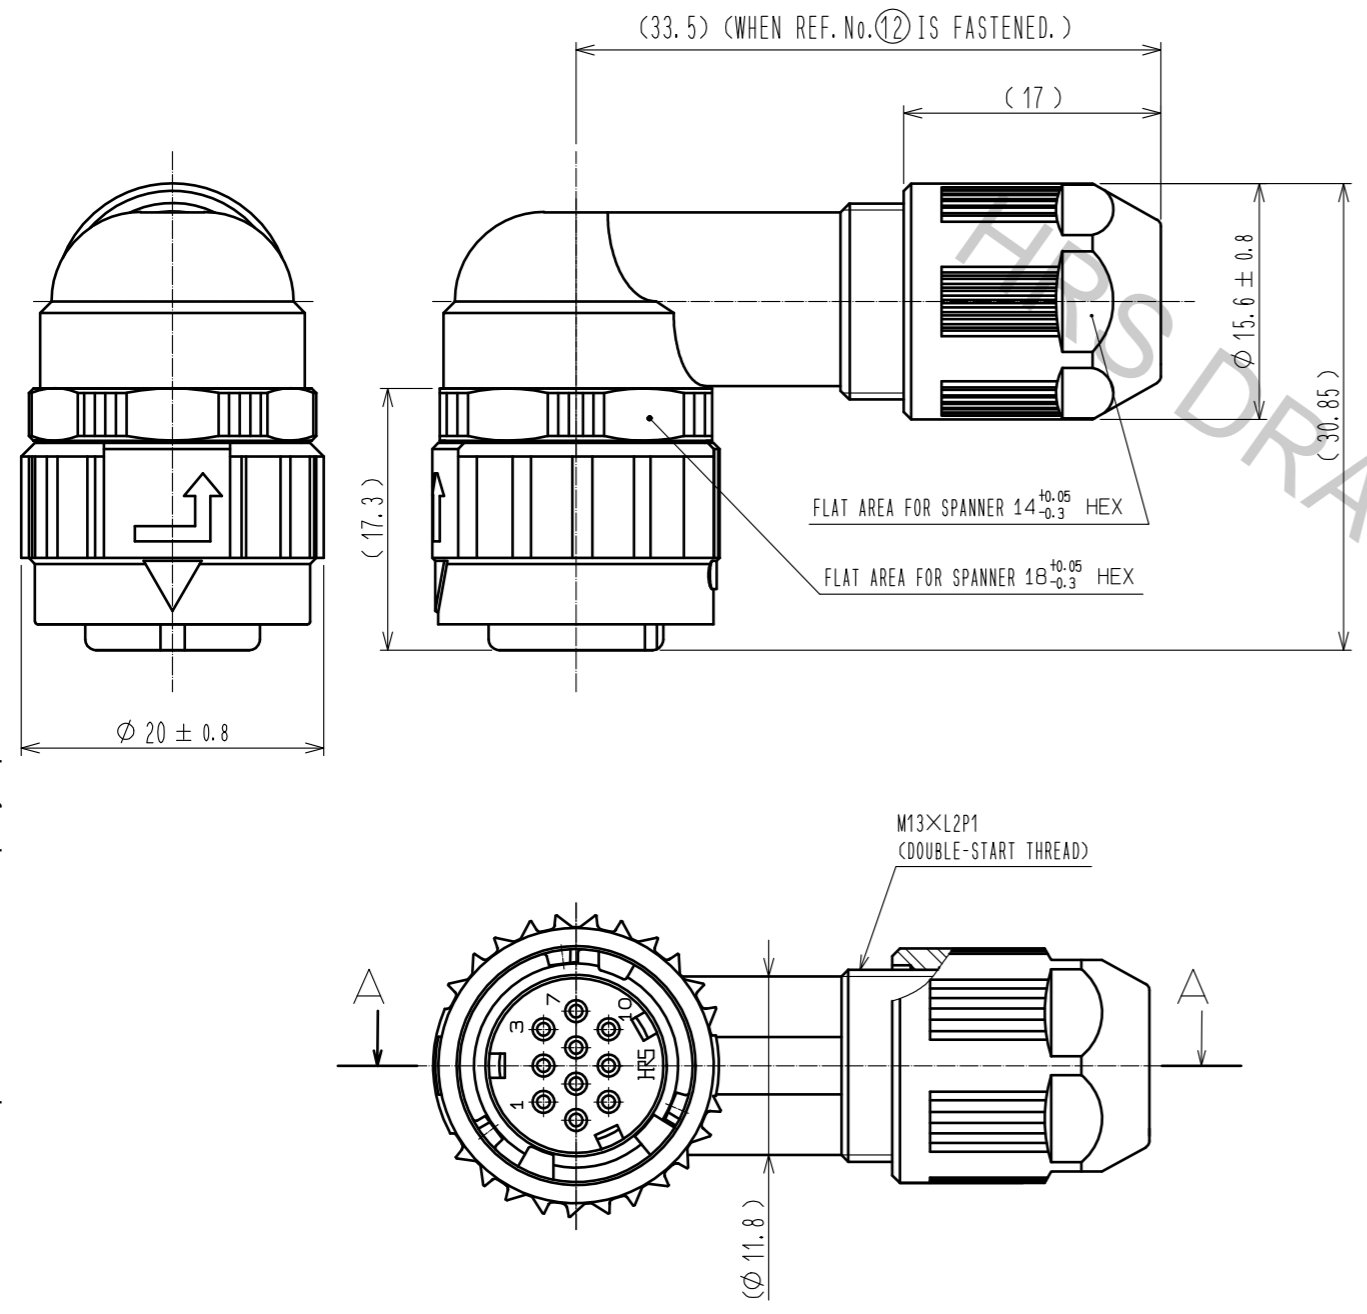

NOTES

- THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ④: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE AND PRIMER OF REF. NO. ④: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
- THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑫: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE AND PRIMER OF REF. NO. ⑫: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
- ROTATION EXAMPLE ARE SHOWN FOR REF. NO. ①, ④, ⑨, AND ⑫.
- THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFER, DEPENDING ON THE CABLE STRUCTURE. PLEASE CONFIRM BEFORE THE USE.

5	STAINLESS STEEL		12	POLYPHENYLENE SULFIDE (BLACK)	UL94V-0			
4	ZINC ALLOY	NICKEL PLATING	11	POLYAMIDE (WHITE)	UL94V-0			
3	ZINC ALLOY	NICKEL PLATING	10	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER (GRAY)				
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.2 μ m min. TERMINAL AREA : GOLD 0.03 μ m min. UNDER PLATING : NICKEL 2 μ m min.	9	POLYAMIDE (BLACK)	UL94V-0			
			8	ACRYLONITRILE BUTADIENE RUBBER (BLACK)				
			7	ACRYLONITRILE BUTADIENE RUBBER (BLACK)				
1	POLYPHENYLENE SULFIDE (BLACK)	UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
		HIROSE ELECTRIC CO., LTD.	APPROVED : HY. KOBAYASHI	18.02.26	DRAWING NO.	EDC-117790-31-00		
			CHECKED : HY. KOBAYASHI	18.02.26	PART NO.	HR08D-12WLPN-10S(31)		
			DESIGNED : DS. MATSUNE	18.02.24	CODE NO.	CL108-0277-3-31		
			DRAWN : AI. NISHIYAMA	18.02.22				